

S6 Pro Datasheet

Product Overview

The S6 Pro combines exceptional power density with proven reliability, making it the benchmark valve across industrial manufacturing, test rigs and demanding automation systems.

It delivers the size, mass and dynamics of the best two-stage valves with the simplicity and low leakage of direct drive technology. Customers benefit from consistent performance, extended service life and reduced downtime.

Key Features

- Integrated electronics with spool position feedback
- Rated flow from 5 to 63 l/min (at 70 Bar ΔP)
- Drop-in replacement on NG06, with an S04 adapter available
- Bandwidth > 250 Hz
- Various power-off positions
- Low power consumption of less than 5 W
- Chip shear capability of greater than 400 N
- Mass of 620 g

Configuration

The S6 Pro is designed to be easily configurable. The standard options are set out in the SKU selection on page 6. Non-standard customisations are also available, and our sales team would be happy to discuss your requirements.

Contents


Technical Data.....	2
Performance Graphs	3
Standards References	4
Unit Dimensions	4
Mounting Dimensions	5
LED Status	5
SKU Selection	6
NG06 to S04 Adapter	14

Contact Us

If you have any questions about using the S6 Pro, or if you need a non-standard configuration, we would be happy to hear from you.

Contact us using the details below and one of our team will be there to assist you.

33 Colston Avenue, Bristol, BS1 4UA
+44 (0)333 090 5140 (UK)
sales@domin.com
domin.com

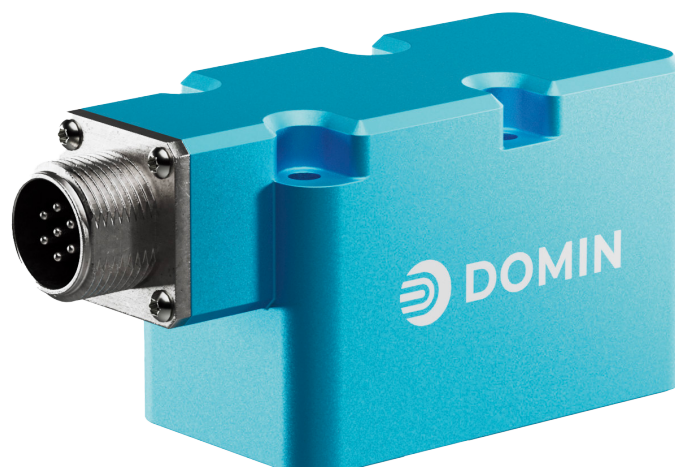

Technical Data

General Data

Design		Direct Drive Servo Valve
Actuation		Rotary-Linear
Size		NG06
Mounting Interface		ISO 4401-03-02
Ambient Temperature	°C (°F)	-20 to +60 (-4 to +140)
Mass	kg (lb)	0.62 (1.36)
Vibration Resistance, All Axes ⁽¹⁾	g	30
Shock Resistance, All Axes ⁽²⁾	g	50

Hydraulic Data

Max. Operating Pressure (P, A, B)	Bar (psi)	350 (5,000)	
Max. Operating Pressure (T)	Bar (psi)	250 (3,600)	
Fluid		Hydraulic Oil DIN 51524	
Fluid Temperature	°C (°F)	-20 to +80 (-5 to +175)	
Filtration		ISO 4406 (1999) 18/16/13	
Viscosity	cSt	5 to 500	
Rated Flow ⁽³⁾	l/min (gpm)	5 to 25 (2.6 to 6.6)	25 to 63 (6.6 to 16.6)
Flow Maximum	l/min (gpm)	56 (14.8)	140 (36.9)
Pressure Gain	%/%	> 40	
Leakage at 100 bar	l/min (gpm)	< 0.5 (0.13)	< 1.1 (0.3)

Static/Dynamic Data

Response Time at 100% ⁽⁴⁾	ms	< 3.5	
Frequency Response (-3dB gain, ±25% signal) ⁽⁴⁾	Hz	> 250	
Frequency Response (-90deg phase, ±25% signal) ⁽⁴⁾	Hz	> 200	
Hysteresis	%	< 0.2	
Threshold	%	< 0.1	
Null Shift	%	< 1	

1. BS EN 60068-2 (20-35 Hz, 16 g for 15 minutes per axis, 35-2000 Hz, 35 g for 15 minutes per axis)


2. BS EN 60068-2 (20 shocks 50 g in Z axis)

3. Rated at a ΔP of 70 bar (35 bar per edge). 63 l/min only available for axis cut valves.


4. Measured as 90% output rise time with Δ70 bar P-T (two control edges)

Performance Graphs

Step Response ⁽¹⁾

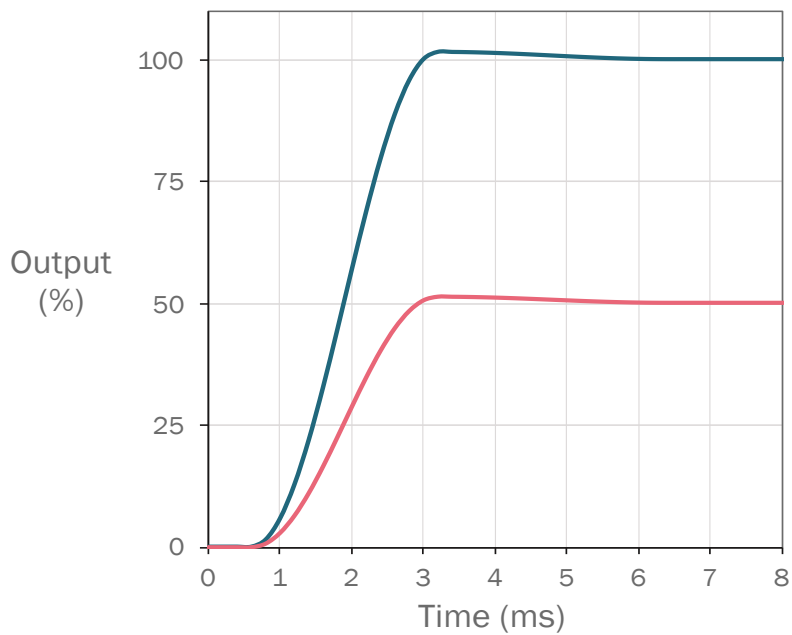

Frequency Response ⁽¹⁾

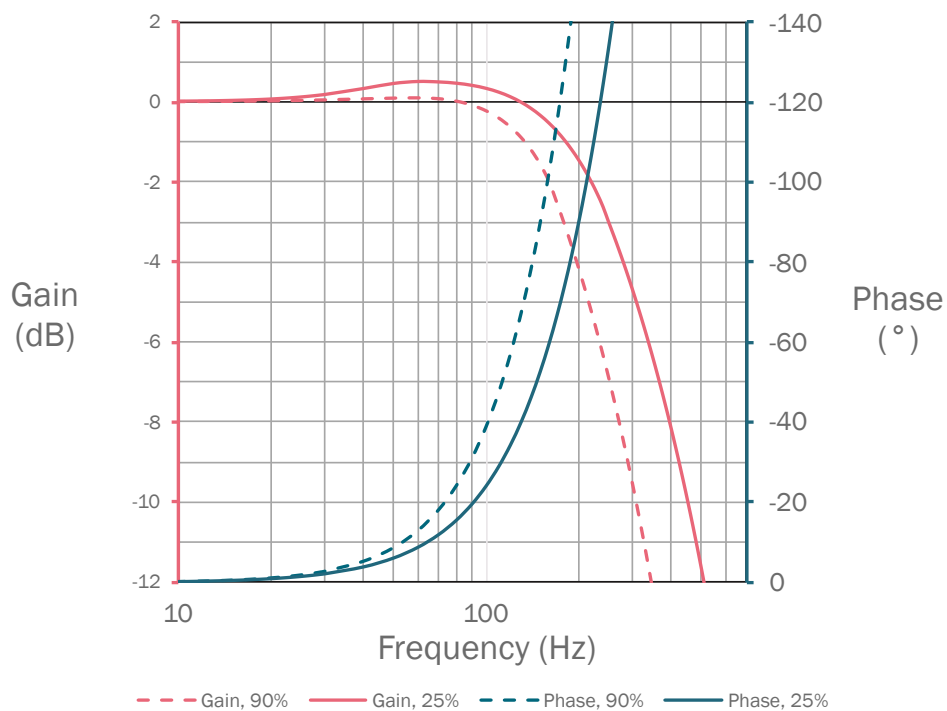



1. Measured at a 70 bar pressure drop.

Standards References



EMC Regulations:	Immunity: EN 61000-6-2, Emission: EN 61000-6-3
Performance Tests:	ISO 10770-1
Pressure Rating:	ISO 10771
Hydraulic Interface:	ISO 4401-03-02

Unit Dimensions

Connector Code E and E4

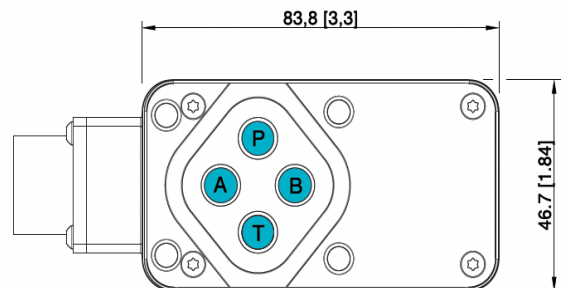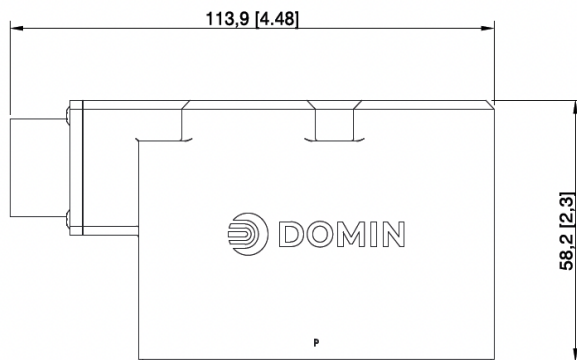


Connector Code G and B4

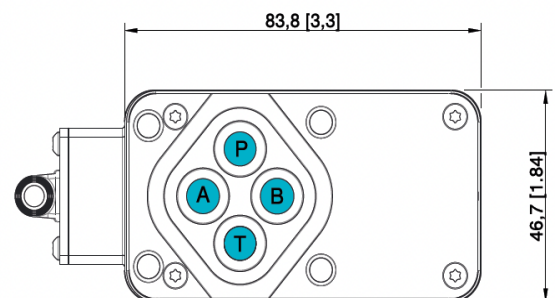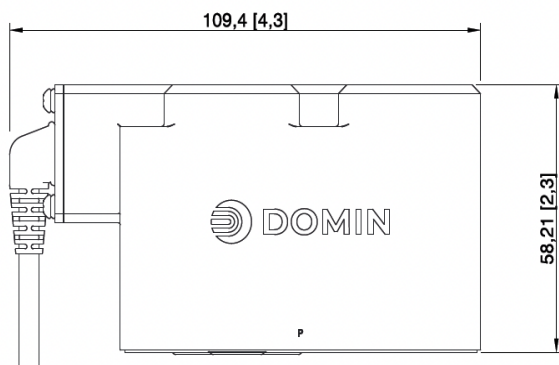

Nominal dimensions are displayed in mm, [] indicates inches. Not to scale.

Mounting Dimensions

		P	A	B	T	F1	F2	F3	F4
Diameter	mm	7.5	7.5	7.5	7.5	M5	M5	M5	M5
X Position	mm	21.5	12.7	30.2	21.5	0	40.5	40.5	0
Y Position	mm	25.9	15.5	15.5	5.1	0	-0.75	31.75	31

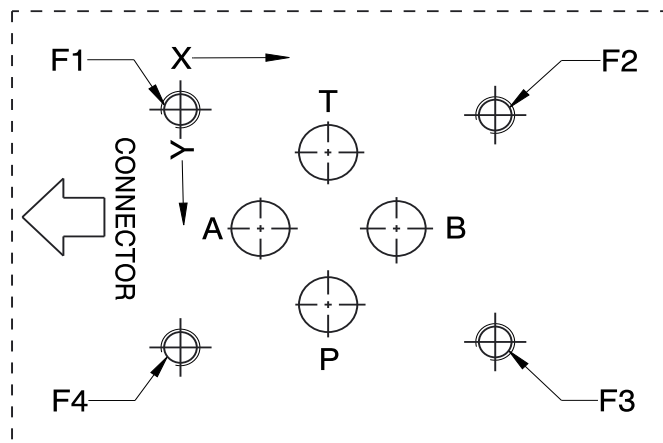

Bolts (F1, F2, F3, F4)

Type: M5 x 55 mm DIN EN ISO 4762-10.9

Required Torque: 7.5 Nm (5.5 ft-lbf)

O-Rings (P, A, B, T)

Type: 9.25 x Ø 1.78 (ISO 3601-1-012)

LED Status

LED Colour	LED State	Motor Drive State	Valve State
Green	Solid - On	Motor Drive On	Valve OK
	Flashing	Motor Drive On	Warning Present
Red	Solid - On	Motor Drive Off	Valve OK
	Flashing	Motor Drive Off	Error Present

Use our SKU builder to configure your Domin Valve. If you need a non-standard setup or a bespoke option, just get in touch – we can tailor a solution to suit your exact requirements.

S6 Pro Datasheet | Issue 4.3

Code 1 Rated Flow

Any value in range 5 to 63 l/min rated at 35 bar ΔP per control edge. R – Suffix for reversal of A and B port e.g. 60R

$$Q = Q_N \sqrt{\frac{P}{70}}$$

Q = Calculated flow
 Q_N = Rated flow (at 70 bar)
 P = Pressure





Code 2 Flow Behaviour

The flow behaviour of the valve is defined in two sections, the mechanical spool cut that makes the hydraulic connections and the software characteristic (flow map) that controls the flow with respect to input demand.

By default, each hydraulic connection will have a default flow mapping, and the code will be simplified to a single letter. If a non-default flow mapping is desired a second letter will denote the flow map. E.g., an Axis-Linear valve will have a single code A, an Axis-Deadband valve will have the code AD.

Please enquire for other options.


Hydraulic Connections

Code	Hydraulic Connection	Description	Symbol	Default Flow Map
A	Axis	1% overlap		Linear
B	Float	5% overlap P 5% underlap T		Deadband
D	Blocked	5% overlap		Deadband
O	Overlap	3% overlap		Gradual
X	For other options please enquire			


Flow Map

Code	Flow Map	Description
A	Linear	100% flow gain across full range
D	Deadband	0% flow gain between $\pm 10\%$ flow demand
O	Gradual	50% flow gain between $\pm 3\%$ flow demand


A - Linear

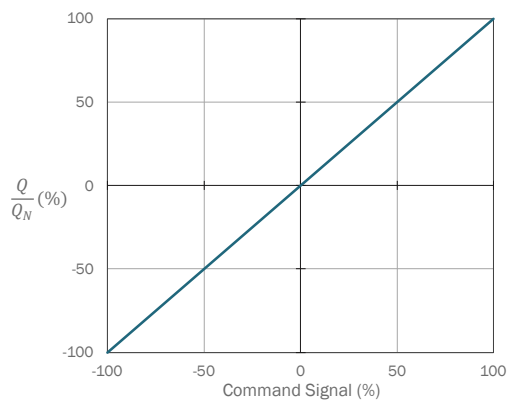

D - Deadband

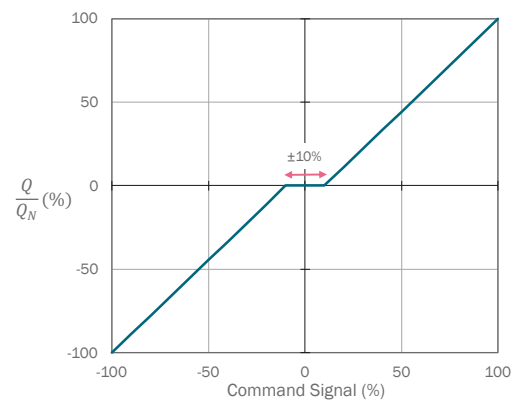

O - Gradual

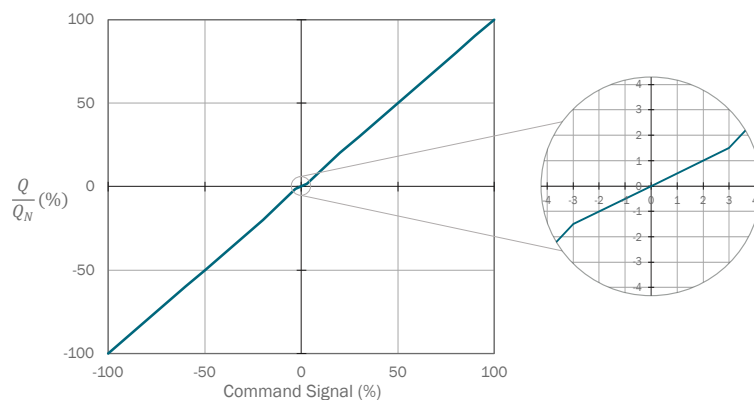

Code 3 Control Methods

Code	Input Signal	Input Impedance	Output Signal	Output Load Impedance
A	± 10 V	200 kΩ	± 10.5 V	-
D	± 5 V		± 5.25 V	
E	± 5 mA		± 5.25 mA	
F	± 10 mA	402 Ω	± 10.5 mA	600 Ω
B	± 20 mA		± 21 mA	
I ⁽²⁾	± 25 mA		-	
C ⁽¹⁾	4 to 20 mA	200 Ω	3.8 to 21 mA	600 Ω
G ⁽²⁾	± 50 mA		-	
H ⁽²⁾	± 40 mA		-	
X	For other options please enquire			

1. For 4 to 20mA input signal, a current input below 2 mA will disable the motor drive
2. Configuration available for Input only. Default output will be Control Mode - A
3. Valves with a current command signal use a 0.1% tolerance shunt resistor to measure demand current.
4. For differing input and output signals, use two letters, e.g. AC denotes $\pm 10\text{V}$ input and 4 to 20mA output

Electrical

Supply Voltage (Operational)	V	22 to 30
Supply Voltage (Absolute) ⁽¹⁾	V	-0.5 to 33
Current Consumption ⁽²⁾	A	0.2
Peak Current Draw ⁽³⁾	A	4.5

1. Conditions outside the absolute maximum ratings may cause permanent damage to the valve. These are absolute ratings only.
Operation of the product outside of the nominal operating conditions is not guaranteed and may affect product reliability
2. Approximate current consumption for 100 Hz at 25 % amplitude
3. The valve supply must be protected with a 5 AT fuse or equivalent overcurrent protection device

Code 4 Power-Off Position

Power-off position defines the hydraulic connection that the valve will move to when the power / input is removed, or if the valve errors, or if the enable pin (if enable mode Y) is low

Code	Name	Description	Symbol
B	Float	P blocked, A, B, T connected	
C	Passive	Spool is intended to return to centre passively under typical flow conditions	
D	Blocked	All ports blocked	
PA	A Bias	P connected to A, B connected to T	
PB	B Bias	P connected to B, A connected to T	
X	For other options please enquire		


Code 5 Electrical Connectors

6 + PE Circular Connector (E)

Type: Case-Mounted

Termination: Connector according to EN 175201-804/MIL 5015 equivalent, shell size 14

Number of Contacts: 7

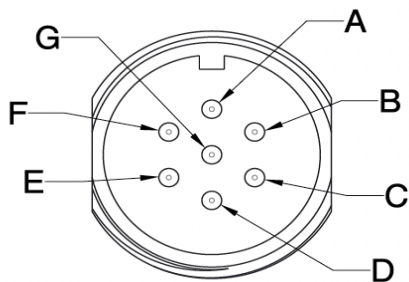

Pin	Function	Description
A	Supply +	+24 V
B	Supply 0 V	0 V
C ⁽¹⁾	Output – Enable input	Output 0 V Reference Drive enable input
D	Input +	Differential input signal, +
E	Input –	Differential input signal, –
F	Output +	Output Signal
G	Earth	-


1. When the enable function is selected, the function of pin C is the enable input. This replaces the standard pin function.

4 Pin Circular Connector (E4)

Type: Case-Mounted

Termination: Connector according to EN 175201-804/MIL 5015 equivalent, shell size 14

Number of Contacts: 4




Pin	Function	Description
A	Supply +	+24 V
B	Input +	Differential input signal, +
C	Input –	Differential input signal, –
D	Supply 0 V	0 V

4 Contact, Unterminated flying lead (B4)

Type: Flying Lead (300mm length)

Termination: Bare Wires - 4-Core 22 AWG Unscreened




Colour	Function	Description
White	Supply 0 V	0 V
Black	Supply +	+24 V
Green	Input – (Ground Reference)	Differential Input Signal, –
Red	Input +	Differential input signal, +

G4-20P Rack and Panel Connector (G)

Type: Flying Lead

Termination: Winchester™ G4-20P



Pin	Function	Description
A	Input – (Ground Reference)	Differential Input Signal, –
B	Input +	Differential input signal, +
C	Supply 0 V	0 V
D	Supply +	+24 V

Code 6 Enable Modes

Valves can be provided with an enable function. This allows the valve to be enabled or disabled by varying the voltage into the enable pin. Note that valves with a code C command type can also be enabled or disabled using the command signal; see the corresponding table above for further details. Enable function is only applicable with Code E electrical connector option.

N No Enable Functionality

Y Enable mode on

Normal Operating Conditions		Units	Min.	Typical	Max.
Enable Mode	Drive On	V	9	-	30
	Drive Off	V	0	-	5
	Input Impedance	kΩ	-	15	-

Code 7 Fluid Types

R Recommended - any hydraulic oil in accordance with DIN 51524, filtered in accordance with ISO4406 18/16/13. Compatibility with water-free synthetic fluids available on enquiry.

X For other options please enquire

Code 8 Seal Materials

N Nitrile (Shore 90)

V Viton (Shore 85)

F FFKM (Shore 80)

X For other options please enquire

NG06 to S04 Adapter Plate

Technical Information

General Data

Available Material		Aluminium - 7075-T6 Steel - 316
S6 Pro Valve Interface		ISO 4401-03-02-0-05
Mounting Interface		ISO 10372-04-04-0-92
Mass	kg (lb)	0.119 (0.262) – Aluminium 0.341 (0.752) - Steel
Max. Operating Pressure (P, A,B)	bar (psi)	350 (5000)
Max. Operating Pressure (T)		250 (3600)

Bolts for S6 Pro Mounting

Type: M5 x 55 mm DIN EN ISO 4762-10.9
Required Torque: 7.5 Nm (5.53 ft-lbf)

O-rings (P, A, B, T)

Type: 10.82 x Ø 1.78 (BS013)
Material: NBR, FFKM or Viton


Adapter Plate Bolts Recommended

Type: Metric: M8 DIN EN ISO 4762-10.9
Imperial: 5/16 ASME B1.1-2003 Grade 8
Required Torque: 15 Nm (11.06 ft-lbf)
Min Length: 25 mm or 1 inch





Part Dimensions

Top View

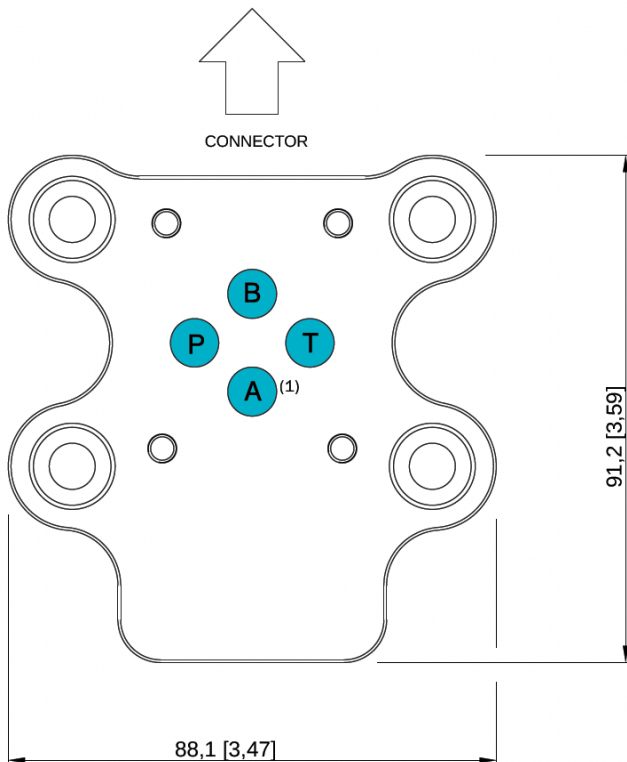

Bottom View

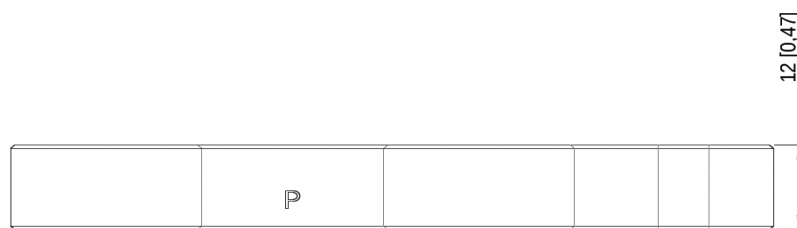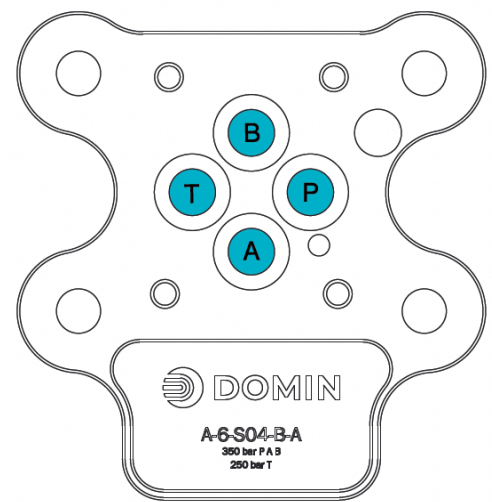

Left View

Nominal dimensions are displayed in mm, [] indicates inches. Not to scale.

1. This port configuration (A & B) is true when ordering the S6 Pro in reverse polarity e.g (S6 Pro-60R...). This is due to the difference in port patterns from ISO4401-03-02 to ISO 10372-04-04.
If you have any questions about using the S6 Pro Adapter Plates, or if you need a non-standard configuration, please contact us using the details below and one of our team will be there to assist you.